

### General features


- New enhanced series
- High switching speed
- $h_{FE}$  improved linearity
- $h_{FE}$  Grouping

### Applications


- Linear and switching industrial application

### Description

The TIP31C is a base island technology NPN power transistor in TO-220 plastic package with better performances than the industry standard TIP31C that make this device suitable for audio, power linear and switching applications. The PNP type is TIP32C.

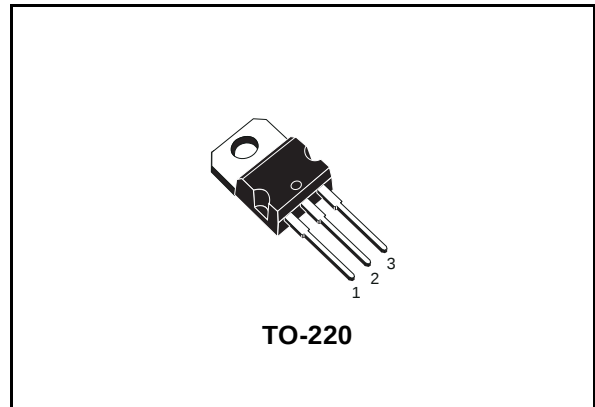

### Internal schematic diagram

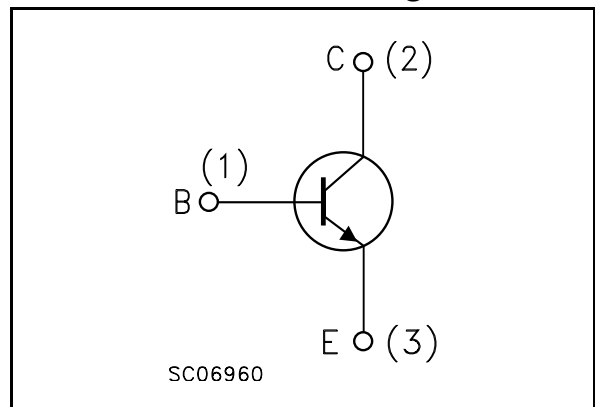

### Order codes

| Part Number                      | Marking                          | Package | Packing |
|----------------------------------|----------------------------------|---------|---------|
| TIP31C<br><i>Note: on page 4</i> | TIP31C R<br>TIP31C O<br>TIP31C Y | TO-220  | Tube    |

Contents

1      **Electrical ratings** ..... 3

2      **Electrical characteristics** ..... 4

      2.1    Electrical characteristics (curve) ..... 5

3      **Package mechanical data** ..... 6

4      **Revision history** ..... 8



# 1 Absolute maximum ratings

**Table 1. Absolute maximum ratings**

| Symbol    | Parameter                                            | Value      | Unit               |
|-----------|------------------------------------------------------|------------|--------------------|
| $V_{CBO}$ | Collector-base voltage ( $I_E = 0$ )                 | 100        | V                  |
| $V_{CEO}$ | Collector-emitter voltage ( $I_B = 0$ )              | 100        | V                  |
| $V_{EBO}$ | Emitter-base voltage ( $I_C = 0$ )                   | 5          | V                  |
| $I_C$     | Collector current                                    | 3          | A                  |
| $I_{CM}$  | Collector peak current                               | 5          | A                  |
| $I_B$     | Base current                                         | 1          | A                  |
| $P_{TOT}$ | Total dissipation at $T_{case} = 25^{\circ}\text{C}$ | 40         | W                  |
|           | Total dissipation at $T_{amb} = 25^{\circ}\text{C}$  | 2          | W                  |
| $T_{stg}$ | Storage temperature                                  | -65 to 150 | $^{\circ}\text{C}$ |
| $T_J$     | Max. operating junction temperature                  | 150        | $^{\circ}\text{C}$ |

## 2 Electrical characteristics

( $T_{\text{case}} = 25^{\circ}\text{C}$  unless otherwise specified)

**Table 2. Electrical characteristics**

| Symbol                      | Parameter                                                      | Test conditions                                                                                                                                   | Min.                     | Typ. | Max.           | Unit |
|-----------------------------|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------|----------------|------|
| $I_{\text{CEO}}$            | Collector cut-off current<br>( $I_{\text{B}} = 0$ )            | $V_{\text{CE}} = 60\text{V}$                                                                                                                      |                          |      | 0.3            | mA   |
| $I_{\text{EBO}}$            | Emitter cut-off current ( $I_{\text{C}} = 0$ )                 | $V_{\text{EB}} = 5\text{V}$                                                                                                                       |                          |      | 1              | mA   |
| $I_{\text{CES}}$            | Collector cut-off current<br>( $V_{\text{BE}} = 0$ )           | $V_{\text{CE}} = 100\text{V}$                                                                                                                     |                          |      | 0.2            | mA   |
| $V_{\text{CEO(sus)}}^{(1)}$ | Collector-emitter<br>sustaining voltage ( $I_{\text{B}} = 0$ ) | $I_{\text{C}} = 30\text{mA}$                                                                                                                      | 100                      |      |                | V    |
| $V_{\text{CE(sat)}}^{(1)}$  | Collector-emitter saturation<br>voltage                        | $I_{\text{C}} = 3\text{A}$ $I_{\text{B}} = 375\text{mA}$                                                                                          |                          |      | 1.2            | V    |
| $V_{\text{BE(on)}}^{(1)}$   | Base-emitter voltage                                           | $I_{\text{C}} = 3\text{A}$ $V_{\text{CE}} = 4\text{V}$                                                                                            |                          |      | 1.8            | V    |
| $h_{\text{FE}}^{(1)}$       | DC current gain                                                | $I_{\text{C}} = 1\text{A}$ $V_{\text{CE}} = 4\text{V}$<br>$I_{\text{C}} = 3\text{A}$ $V_{\text{CE}} = 4\text{V}$<br>Group R<br>Group O<br>Group Y | 25<br><br>10<br>20<br>40 |      | 24<br>44<br>50 |      |

1. Pulsed duration = 300 ms, duty cycle  $\geq 1.5\%$

**Note:** *Product is pre-selected in DC current gain (Group R, Group O and Group Y).  
STMicroelectronics reserves the right to ship each groups according to production  
availability. Please contact your nearest STMicroelectronics sales office for delivery details.*

2.1 Electrical characteristics (curve)

Figure 1. Safe Operating area

Figure 2. Derating curves

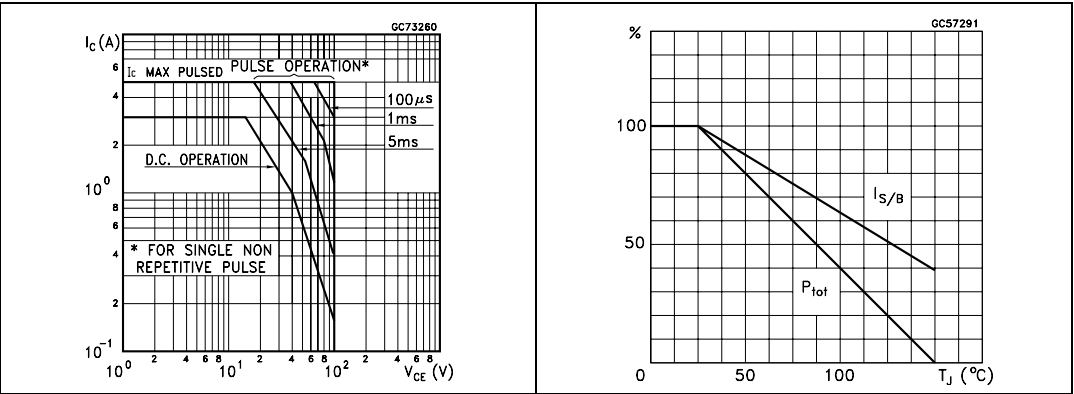


Figure 3. DC-current gain

Figure 4. DC-current gain

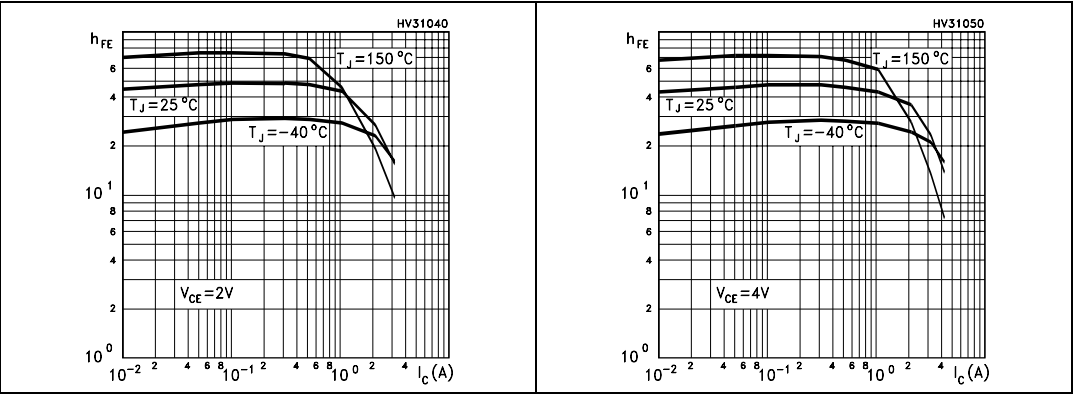


Figure 5. Collector-emitter saturation voltage

Figure 6. Base-emitter saturation voltage


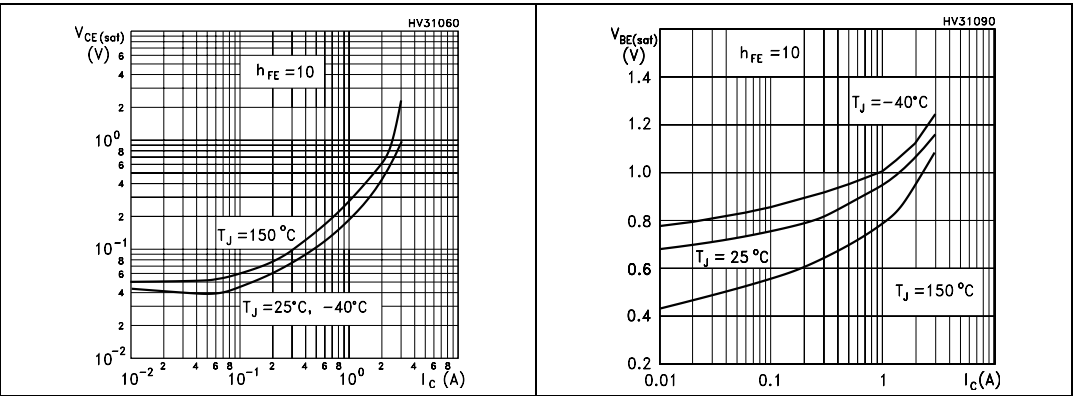



Figure 7. Base-emitter on voltage

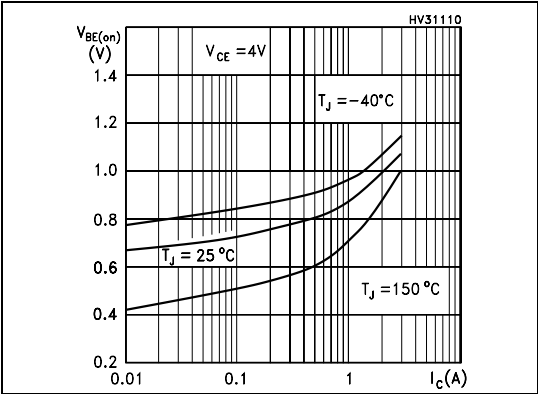

### 3      **Package mechanical data**

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com)

| TO-220 MECHANICAL DATA |       |       |       |       |       |       |
|------------------------|-------|-------|-------|-------|-------|-------|
| DIM.                   | mm.   |       |       | inch  |       |       |
|                        | MIN.  | TYP   | MAX.  | MIN.  | TYP.  | MAX.  |
| A                      | 4.40  |       | 4.60  | 0.173 |       | 0.181 |
| b                      | 0.61  |       | 0.88  | 0.024 |       | 0.034 |
| b1                     | 1.15  |       | 1.70  | 0.045 |       | 0.066 |
| c                      | 0.49  |       | 0.70  | 0.019 |       | 0.027 |
| D                      | 15.25 |       | 15.75 | 0.60  |       | 0.620 |
| E                      | 10    |       | 10.40 | 0.393 |       | 0.409 |
| e                      | 2.40  |       | 2.70  | 0.094 |       | 0.106 |
| e1                     | 4.95  |       | 5.15  | 0.194 |       | 0.202 |
| F                      | 1.23  |       | 1.32  | 0.048 |       | 0.052 |
| H1                     | 6.20  |       | 6.60  | 0.244 |       | 0.256 |
| J1                     | 2.40  |       | 2.72  | 0.094 |       | 0.107 |
| L                      | 13    |       | 14    | 0.511 |       | 0.551 |
| L1                     | 3.50  |       | 3.93  | 0.137 |       | 0.154 |
| L20                    |       | 16.40 |       |       | 0.645 |       |
| L30                    |       | 28.90 |       |       | 1.137 |       |
| øP                     | 3.75  |       | 3.85  | 0.147 |       | 0.151 |
| Q                      | 2.65  |       | 2.95  | 0.104 |       | 0.116 |

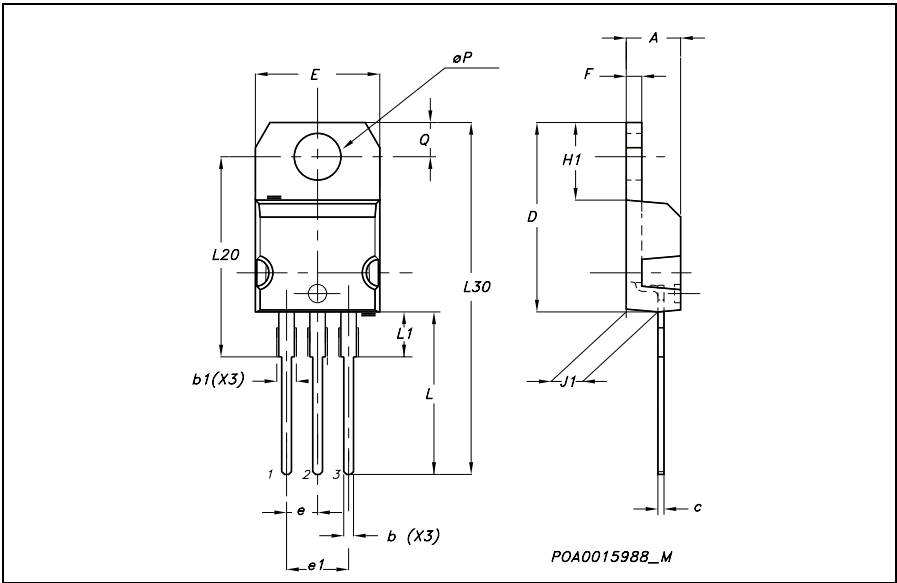

## 4 Revision history

**Table 3. Revision history**

| Date        | Revision | Changes     |
|-------------|----------|-------------|
| 20-Apr-2006 | 1        | New release |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF ST, ST PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS, WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2006 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[TIP31C](#)